


# OVERHEAD POLE INSTALLATION

## SINGLE PHASE 120/240 VOLT

### MAXIMUM 200 AMP

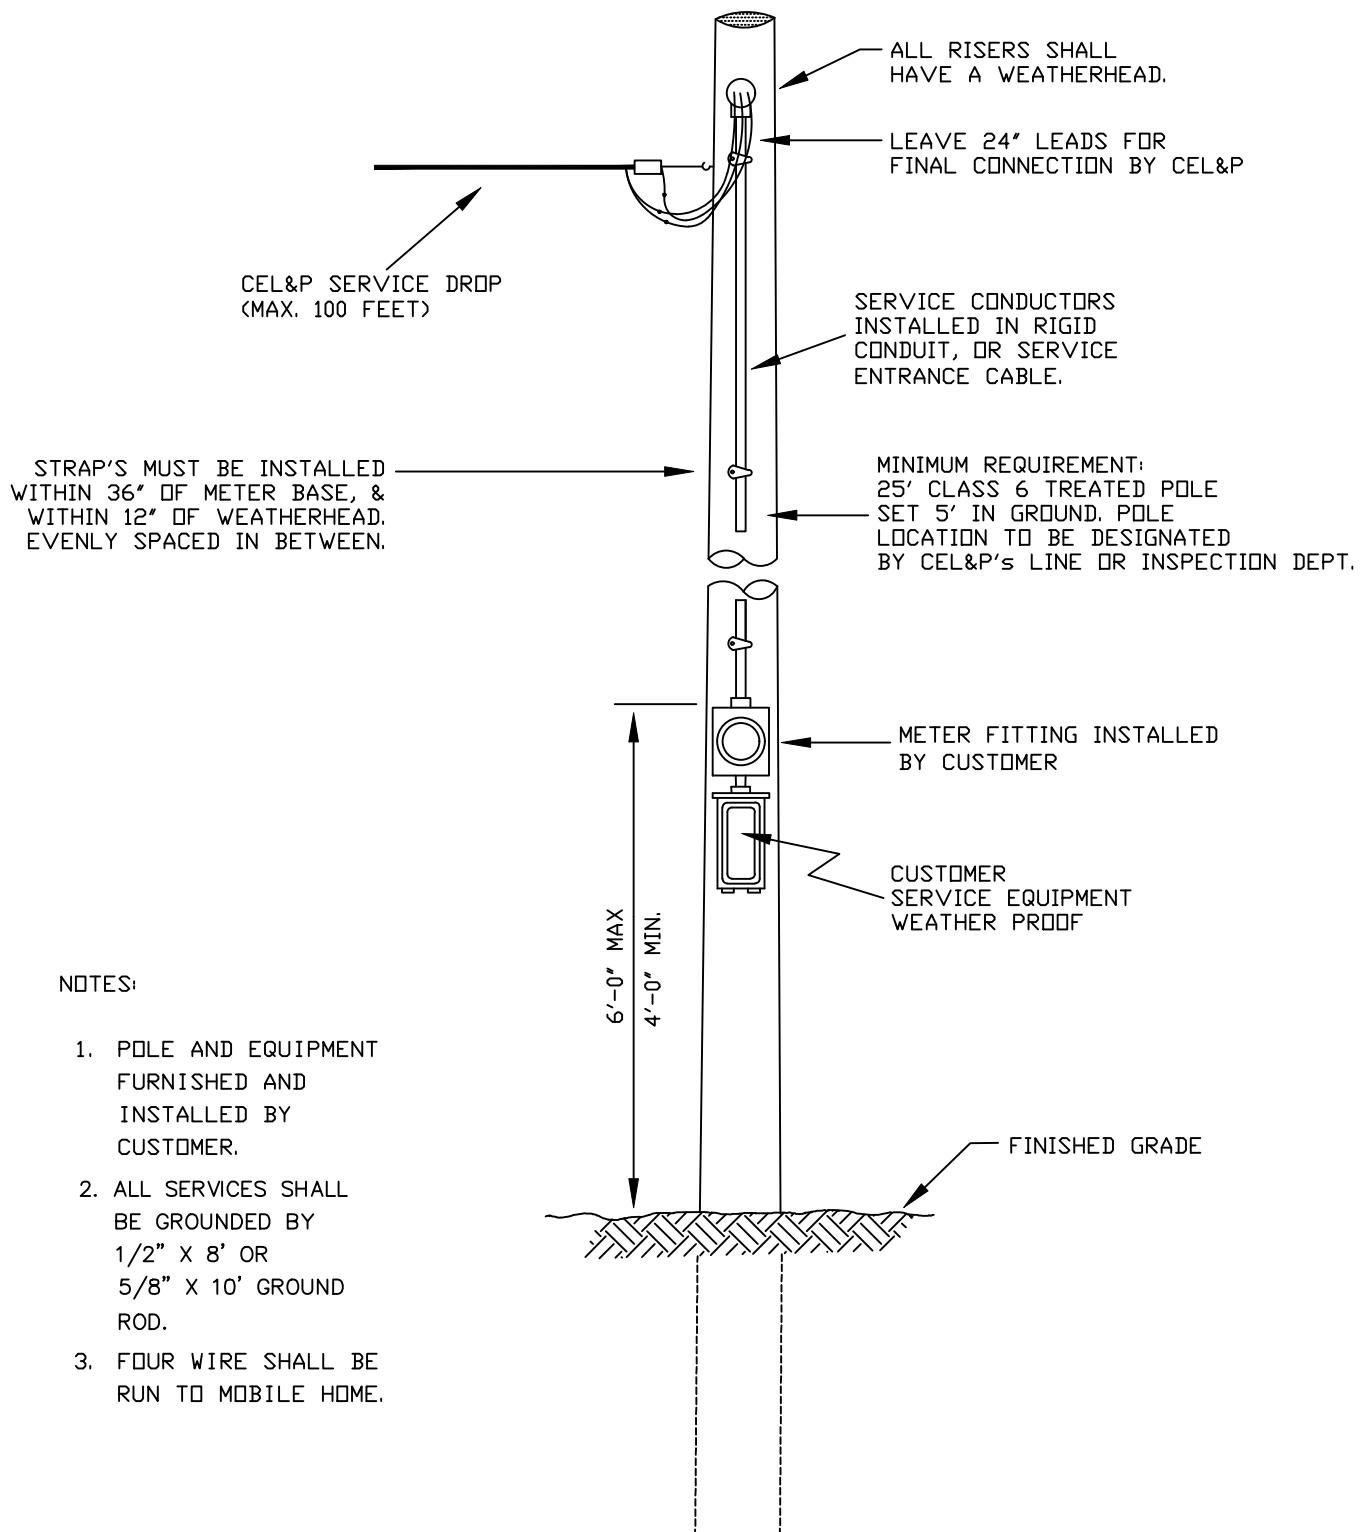

NOTES:

1. POLE AND EQUIPMENT FURNISHED AND INSTALLED BY CUSTOMER.
2. ALL SERVICES SHALL BE GROUNDED BY 1/2" X 8' OR 5/8" X 10' GROUND ROD.
3. FOUR WIRE SHALL BE RUN TO MOBILE HOME.



Overhead Service Installation Drawing